

# TALON 12.5



# TALON 12.5 SR

**Part Number:** 1612200 12V DC

**Application:** Vehicle Recovery/Off Road/ Truck & Trailer

**Specifications**

- Rated Line Pull: 12,500 lbs (5,670 kgs)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented, Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Wire Rope 3/8" x 85' (9.5mm x 26m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Heavy Duty 4-way Roller Fairlead with Stainless Steel Rollers
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 24.57" L x 6.2" D x 10.95" H  
(624.2mm L x 157.5mm D x 278.15mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 94 lbs (42 kgs)
- Shipping Weight: 107 lbs (48 kgs)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16900 4

**Performance** (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.89)
12,500 (5,670)	530	3.25 (0.99)

**Part Number:** 1612201 12V DC


**Application:** Vehicle Recovery/Off Road/Commercial Truck & Trailer

**Specifications**


- Rated Line Pull: 12,500 lbs (5,670 kgs)
- Motor: Sealed 6.0 hp (4.48 kW) Series Wound
- Gearing: 2-Stage Planetary & 2-Stage Spur
- Gear Ratio: 148:1
- Vented Sealed Submersible Solenoid with 3-Year Warranty
- Freespooling Clutch: Pull and Turn
- Brake: Automatic/100% Load Holding (outside of drum)
- Synthetic Rope 3/8" x 80' (9.5mm x 24.4m)
- Hook: Heavy Duty/Clevis Pinned/Latched
- Hawse: Blue Anodized Aluminum
- Remote: 15' Sealed Ergonomic Hand-Held w/Coiled Cord
- Dimensions: 24.57" L x 6.2" D x 10.95" H  
(624.2mm L x 157.5mm D x 278.15mm H)
- Drum Diameter: 2.5" (63.5mm)
- Drum Length: 8.75" (222.25mm)
- Mounting Bolt Pattern: 10" x 4.5" (254mm x 114.3mm)
- Installed Weight: 68 lbs (31 kgs)
- Shipping Weight: 81 lbs (37 kgs)
- Limited Lifetime Warranty/3-Year Electrical
- UPC 0 22705 16901 1

**Performance** (First layer on drum)

Line Pull lb (kg)	Motor Amps	Line Speed FPM (MPM)
0	75	62 (18.89)
12,500 (5,670)	530	3.25 (0.99)

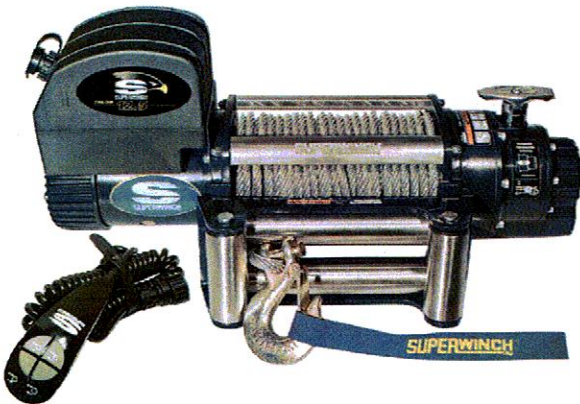

CE

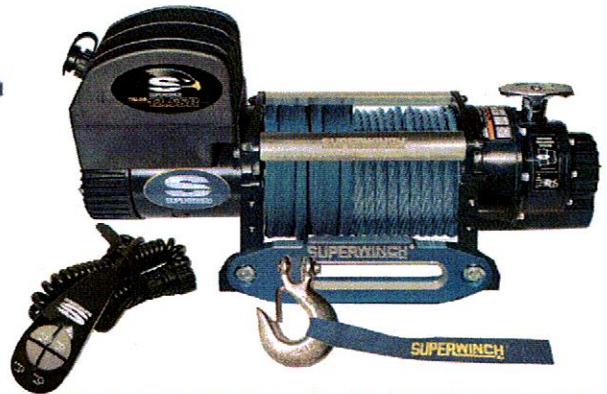

Customer Service, U.S.A. 800 323 2031

Customer Service, U.K. 44(0) 1822 614101